



# LED DOCK ASSEMBLIES

## LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments

### Complete Dock Light Assemblies

The all-in-one design of the complete series stands ready for general purpose, wet location, and explosion proof environments. These versatile dock/task lights designed for use in chemical plants, drilling rigs, refineries and any other locations where wet and hazardous chemicals and gases may exist. Constructed of rugged materials and built to withstand the occasional accidental impact, these fixtures are out-of-the-box ready to illuminate your work area.



Location	Item #	Arm Length	Source	CCT	Voltage
Explosion Proof	DLXLED-FL-V2	26in. (Rigid)	39W / 2823Lm / 45° Optic (Flood)	5,100K	120-277V, 50-60Hz
	DLXLED-SP		39W / 2886Lm / 28° Optic (Spot)		
Wet	DLA2-12LED/DLSD-40-ARM-DS	40in. (Rigid)	9W / 1,200Lm / 25° Square Beam Angle	4,000K	120V, 60Hz
	DLAW2-12LED-SP-42-120	42in. (Rigid)	9W / 1,200Lm / 25° Spot Optic		
	DLAW2-12LED-FL-42-120		9W / 1,200Lm / 50° Flood Optic		
	DLAW2-12LED-SP-60-120	60in. (Rigid)	9W / 1,200Lm / 25° Spot Optic		
	DLAW2-12LED-FL-60-120		9W / 1,200Lm / 50° Flood Optic		
	DLA2-12LED/DLSD-60-ARM-DS		9W / 1,200Lm / 25° Square Beam Angle		
General	DL-FLEX-120	38.5in. (Flexible)	10W / 1100Lm / 20° Beam	4,000K	100-277VAC 120VAC
	DL-LED-LH-LMP/DLSD-40-ARM-DS	40in. (Rigid)	18W, PAR 38 LED lamp Spring-loaded socket assembly		120V, 60Hz
	DL-LED-LH-LMP/DLSD-60-ARM-DS	60in. (Rigid)	18W, PAR 38 LED lamp Spring-loaded socket assembly		

#### DLXLED

#### CERTIFICATIONS

UL844 / CSA-C22.2 No.137 (Hazardous)  
 CI D1, Grps C,D  
 CI D2, Grps A,B,C,D  
 CII D1, Grps F,G  
 CII D2, Grps F,G  
 CIII D1, D2  
 T-Code: T6  
 UL1598 / CSA-C22.2 No.250  
 UL1598A (Marine Outside)  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 -20°C to 40°C Ambient  
 NEMA 4X

#### CONSTRUCTION

Copper-free cast aluminum shell and cover  
 1.5" Square steel tubing (Arm)  
 3/4" Tempered glass lens  
 Powder coat safety yellow  
 Zinc plated steel yoke mount (Light head)  
 Weight: 28 lbs.

#### ELECTRICAL

120-277VAC (50/60Hz)  
 Over-voltage, over-current, and short-circuit protection  
 6Ft. wire

#### FEATURES

3 Year Warranty  
 180° horizontal swing  
 Head rotates 230° horizontally and up to 74° vertically

#### DLAW2-12LED

#### CERTIFICATIONS

UL1598 / CSA-C22.2 No.250 (Wet Locations)  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 -18°C to 50°C Ambient (NS Option)  
 +5°C to 50°C Ambient (Standard)  
 CRI>70  
 IK10 (fixture head)

#### CONSTRUCTION

Marine-grade, low-copper-aluminum housing  
 1.5" Square steel tubing (Arm)  
 Clear polycarbonate lens  
 Powder coat safety yellow  
 Zinc plated steel bracket  
 Stainless steel hardware (light head)  
 Weights: 30 lbs. (42in. arm) / 36 lbs. (60in. arm)

#### ELECTRICAL

120VAC (60Hz)  
 3 conductor, grounded cord from head to wall with weather tight fittings

#### FEATURES

5 Year Warranty  
 180° horizontal swing  
 Head rotates 230° horizontally and up to 74° vertically

#### OPTIONS

No switch on junction box (#NS)  
 Ex: DLAW2-12LED-SP-42-NS

#### DL-FLEX-120

#### CERTIFICATIONS

UL1598 / CSA-C22.2 No.250 (Damp Locations)  
 CE  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 -40°C to 40°C Ambient  
 CRI>70  
 IK08

#### CONSTRUCTION

Thermally conductive plastic housing  
 Flexible tubing (arm)  
 Clear polycarbonate, impact resistant lens  
 Safety yellow (Light head)  
 304 Stainless steel hardware  
 3x5in. Zinc plated steel mounting bracket  
 Weights: 7 lbs.

#### ELECTRICAL

100-277VAC (6ft. pigtail standard)  
 120VAC only (6ft. cord w/ NEMA 5-15 plug standard)  
 Bi-level dimming standard

#### FEATURES

3 Year Warranty

(DLA2, DL-INC-LH Certifications - See Page 2)

# LED DOCK ASSEMBLIES

## LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments



### DLA2-12LED

#### CERTIFICATIONS

ETL/cETL  
 CSA-C22.2 No.250-08 (Wet Locations)  
 Lumen Maintenance (L70) >50,000 hrs. (reported)  
 -40°C to 50°C Ambient  
 IK10  
 CE

#### CONSTRUCTION

Cast aluminum housing  
 Impact resistant clear polycarbonate lens  
 Safety yellow powder coat finish  
 Stainless steel yoke mounting bracket  
 Stainless steel hardware  
 Weight: 2.7 lbs.

#### ELECTRICAL

120VAC, 60Hz  
 Input current (Amps): 0.13  
 Recessed 3-prong IEC type (C-14) plug (standard)  
 22in. cord (standard)

#### FEATURES

Mounting: Yoke Bracket (.50" clearance hole)  
 20° Square LED beam angle  
 5 Year Warranty

### DL-LED-LH

#### CERTIFICATIONS

ETL/cETL  
 CSA-C22.2 No.250 (Damp Locations)  
 Suitable for dry locations

#### CONSTRUCTION

High temperature polymer housing  
 Safety yellow powder coat finish  
 Zinc plated yoke mounting bracket  
 Zinc plated steel hardware  
 Weight: 6.0 lbs.


#### ELECTRICAL

120VAC  
 3-prong IEC type (C-14) plug - standard  
 Input current (Amps): 2.08 (at max. 250W)  
 ~12in. cord


#### FEATURES

Mounting: Yoke Bracket  
 Low cost  
 Optional guards (order separately, field installed)  
 Instant-on

#### DIMENSIONS (MODULAR HEADS)

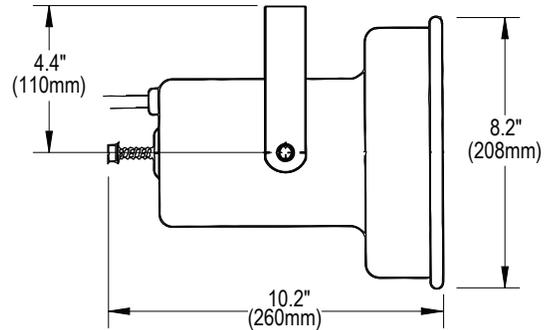

### DL-INC-LH

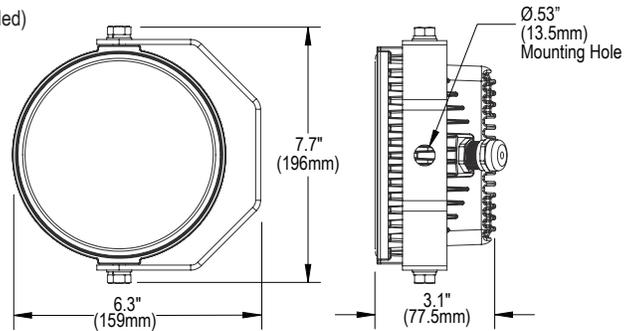


### DLA-12LED

#### DIMENSIONS (DLA2 / DL-INC-LH)


### 40 Inch Arm

120V 5-15P Plug

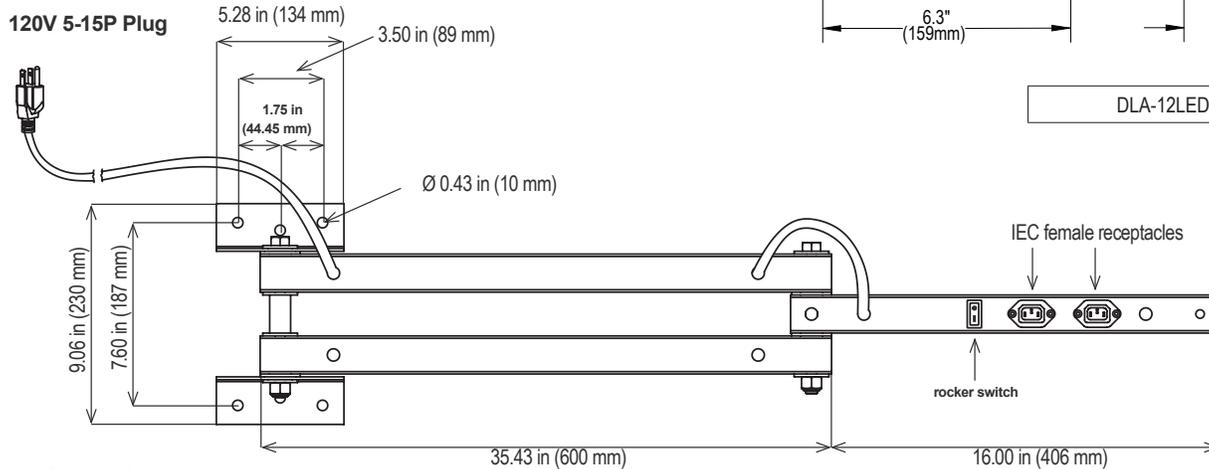

### 60 Inch Arm

120V 5-15P Plug

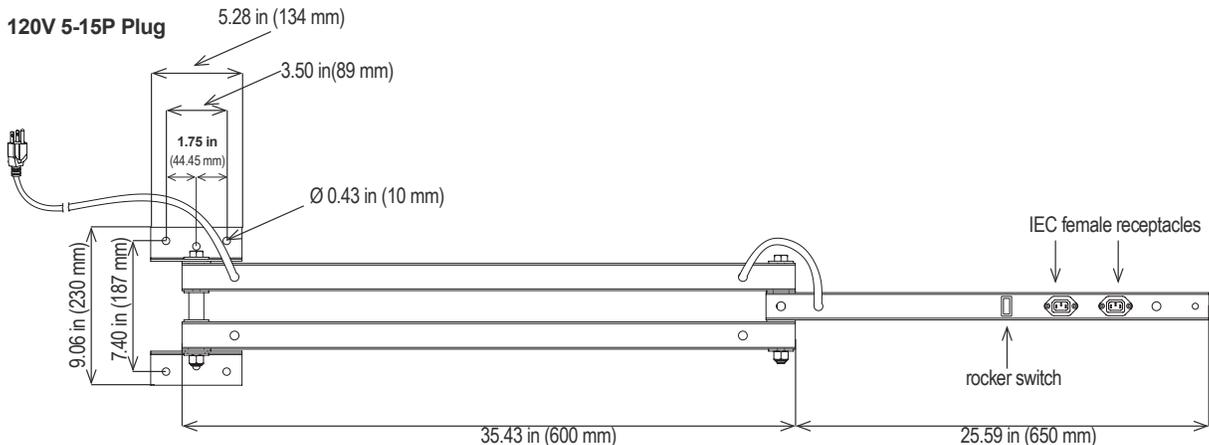

1-800-854-0021 www.ldpi-inc.com  
 LDPI® is a registered trademark of LDPI, Inc. © LDPI, Inc.

Product design and specifications subject to change without notice.  
 Visit www.ldpi-inc.com for the most current version and photometric data. v.02.26.26






# LED DOCK ASSEMBLIES

## LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments



### DIMENSIONS

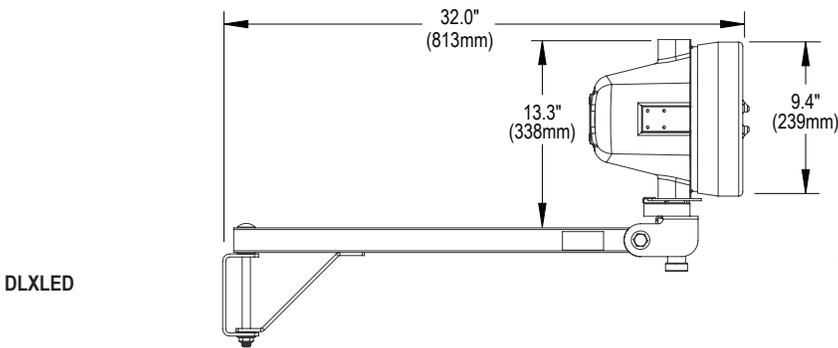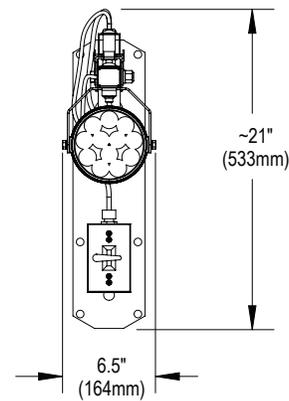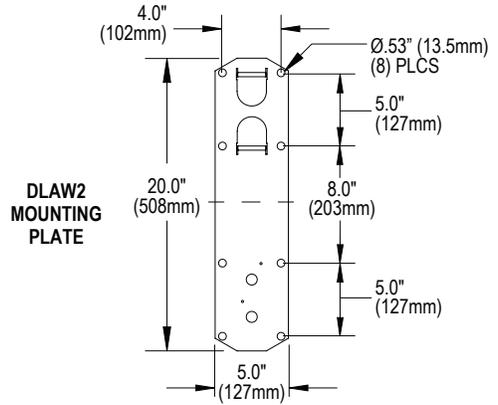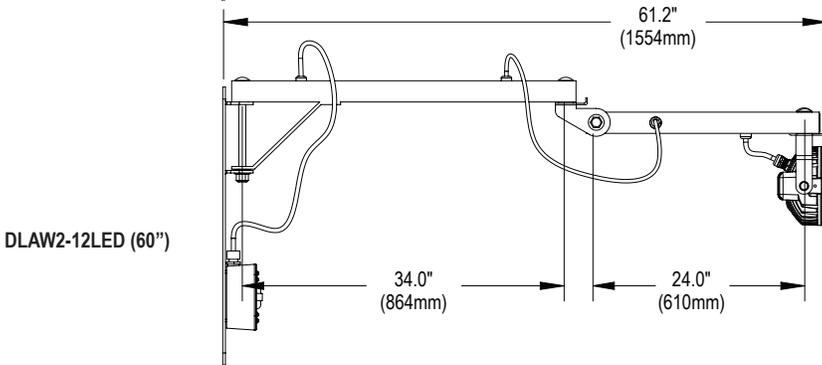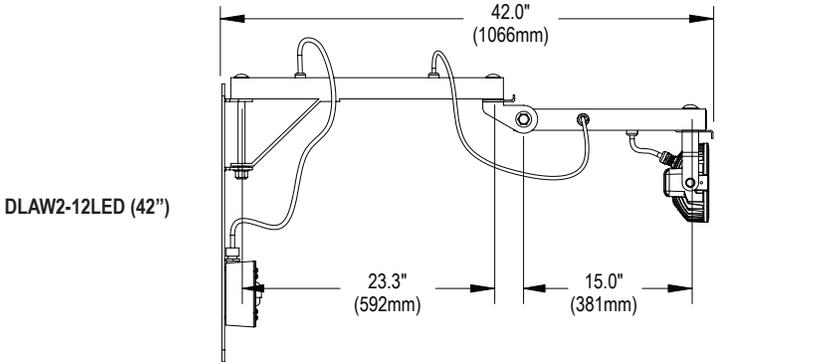

**DLXLED / DL-FLEX-120 MOUNTING PLATE**

