



## Photometric Report (Type C)

Filename: 390236-3546.IES  
[TEST] 23116  
[MANUFAC] LDPI LIGHTING - 2' X 4' OPEN HIGH BAY  
LUMINAIRE  
[LUMCAT] 390236-3546  
[LUMINAIRE] WITH SPECULAR REFLECTORS AND NO LENS  
[LAMPCAT] F32T8/TL850. LUMEN RATING = 2850 LMS.  
[LAMP] SIX PHILIPS 32 WATT T8 LAMPS

Maximum Candela = 5533 at 90 H 12.5 V


### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)  
Upward Wast Light Ratio: 0.00  
Luminaire Efficacy Rating (LER): 85  
Indoor Classification: Direct  
BUG Rating : B3-U1-G1

### Polar Candela Curves:

Vertical Plane Through:  
1) 90 - 270 Horizontal

Horizontal Cone Through:  
2) 12.5 Vertical

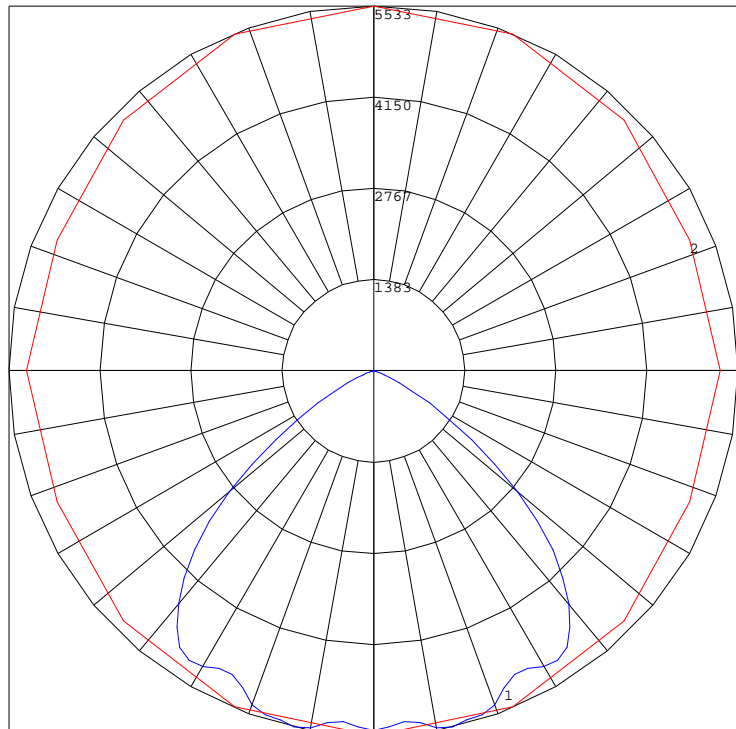



## Photometric Report (Type C)

Filename: 390236-3546.IES  
 [TEST] 23116  
 [MANUFAC] LDPI LIGHTING - 2' X 4' OPEN HIGH BAY  
 LUMINAIRE  
 [LUMCAT] 390236-3546  
 [LUMINAIRE] WITH SPECULAR REFLECTORS AND NO LENS  
 [LAMPCAT] F32T8/TL850. LUMEN RATING = 2850 LMS.  
 [LAMP] SIX PHILIPS 32 WATT T8 LAMPS

Maximum Candela = 5533 at 90 H 12.5 V

### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)  
 Upward Waste Light Ratio: 0.00  
 Luminaire Efficacy Rating (LER): 85  
 Indoor Classification: Direct  
 BUG Rating : B3-U1-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2173.0	12.7	15.3
FM (30-60)	4113.3	24.1	28.9
FH (60-80)	812.9	4.8	5.7
FVH (80-90)	23.0	0.1	0.2
BL (0-30)	2173.0	12.7	15.3
BM (30-60)	4113.3	24.1	28.9
BH (60-80)	812.9	4.8	5.7
BVH (80-90)	23.0	0.1	0.2
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	14244.4	83.4	100.0
BUG Rating	B3-U1-G1		

