



**IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390540.IES**

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-1995
[DATE]11/29/98
[TEST]ITL48519
[MANUFAC]LDPI COMPANY DIVISION OF LPI INC.
[LUMCAT]390540
[LUMINAIRE]FABRICATED METAL HOUSING WITH WHITE PAINTED INTERIOR FINISH,
[MORE]WHITE PAINTED FABRICATED METAL BALLAST COVER, CLEAR FLAT GLASS
[MORE]LENS IN EXTRUDED METAL DOOR FRAME.
[LAMP]FOUR 40-WATT T-8 F40T8 LINEAR FLUORESCENTS.
[_ MOUNTING]RECESSED
[OTHER]NOTE: THIS REPORT WAS PRORATED FROM ITL TEST NUMBER 48514 WHICH
[MORE]WAS TESTED USING FOUR F32T8/TL835, 32-WATT, T-8 LAMPS; ACTUAL
[MORE]PERFORMANCE MAY VARY.
[_ PAINTREFL]85.5 %
[OTHER]THE 0 DEGREE PLANE IS PARALLEL WITH THE LAMPS.

CHARACTERISTICS

Total Rated Lamp Lumens 15100 (4 lamps)
Total Luminaire Efficiency 64 %
CIE Type Direct
Spacing Criteria (0-180) 1.28
Spacing Criteria (90-270) 1.38
Spacing Criteria (Diagonal) 1.46
Basic Luminous Shape Rectangular
Luminous Length (0-180) 5.01 ft
Luminous Width (90-270) 1.04 ft
Luminous Height 0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6287	7008	7292
55	5903	6856	7130
65	5071	6218	6664
75	3368	4648	4048
85	760	1259	1307

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390540.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	2585.14	17.1	26.8
0-40	4303.94	28.5	44.6
0-60	7785.38	51.6	80.6
0-90	9657.01	64	100
90-120	0	0	0
90-130	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	9657.01	64	100

Total Luminaire Efficiency = 64%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	305.41
10-20	891.5
20-30	1388.22
30-40	1718.8
40-50	1820.53
50-60	1660.91
60-70	1226.01
70-80	565.26
80-90	80.35
90-100	0
100-110	0
110-120	0
120-130	0
130-140	0
140-150	0
150-160	0
160-170	0
170-180	0


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390540.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	76	76	76	76	74	74	74	74	71	71	71	68	68	68	65	65	65	64
1	70	67	64	62	68	65	63	61	63	61	59	60	59	57	58	57	55	54
2	64	58	54	50	62	57	53	50	55	52	49	53	50	48	51	49	47	45
3	58	51	46	42	56	50	45	41	48	44	41	46	43	40	45	42	39	38
4	53	45	40	35	51	44	39	35	43	38	35	41	37	34	40	37	34	32
5	49	40	35	30	47	40	34	30	38	33	30	37	33	30	36	32	29	28
6	45	36	31	26	44	36	30	26	34	30	26	33	29	26	32	29	26	24
7	41	33	27	23	40	32	27	23	31	26	23	30	26	23	29	26	23	21
8	39	30	24	21	38	29	24	21	29	24	20	28	23	20	27	23	20	19
9	36	27	22	19	35	27	22	18	26	22	18	26	21	18	25	21	18	17
10	34	25	20	17	33	25	20	17	24	20	17	24	19	17	23	19	16	15

POLAR GRAPH

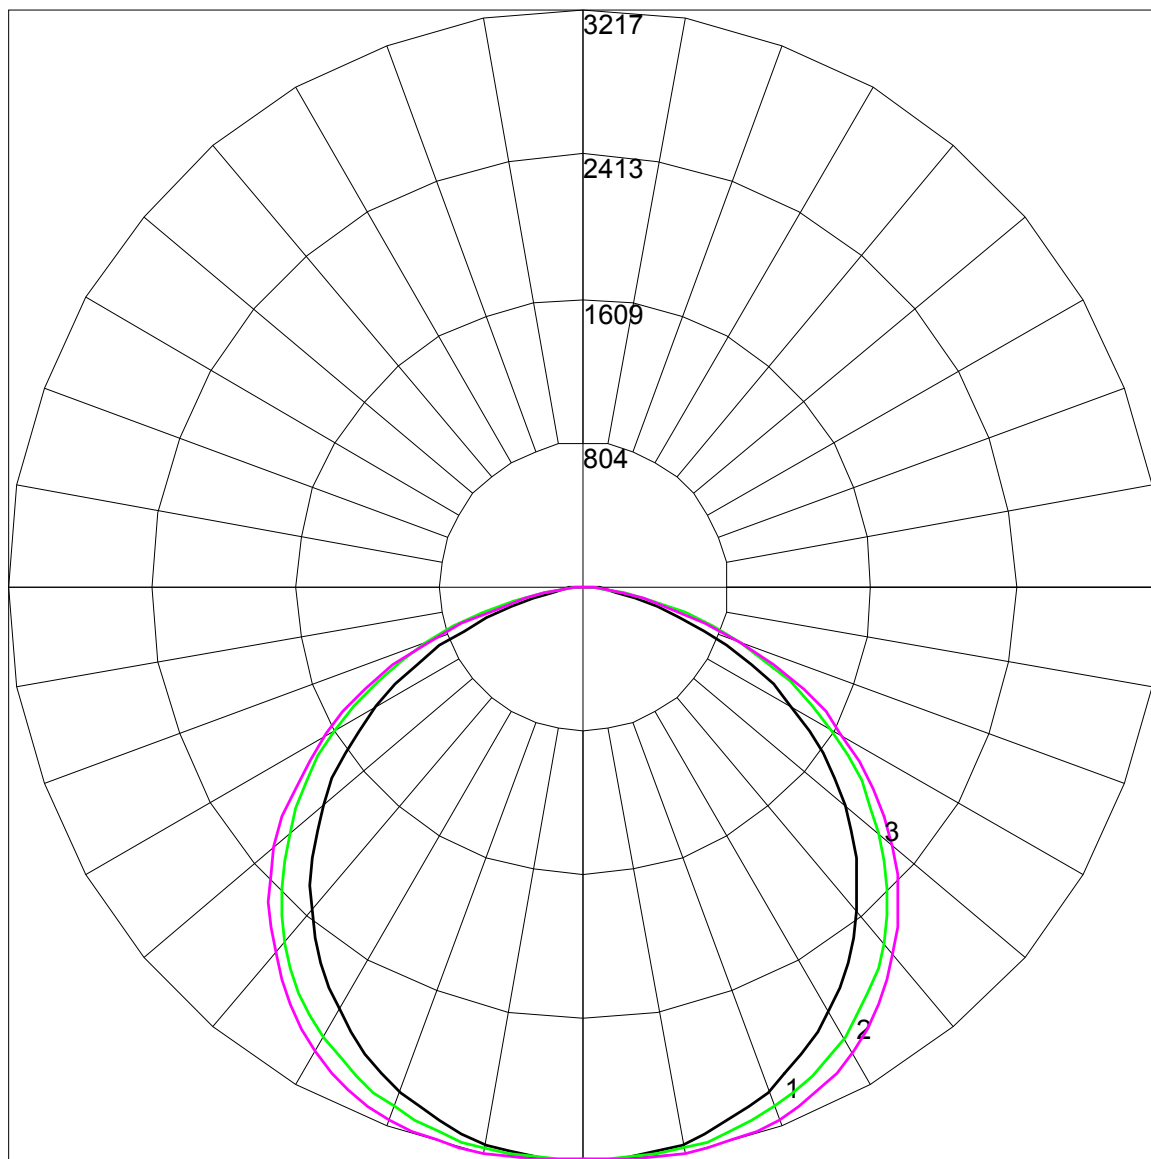

Maximum Candela = 3217 Located At Horizontal Angle = 90, Vertical Angle = 7.5

- # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
- # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
- # 3 - Vertical Plane Through Horizontal Angles (90 - 270)