## 379 SERIES



## **WET / DAMP LIGHTING**

- Fixture rated for wet locations
- · Glass fiber reinforced polyester housing
- Impact resistant acrylic lens standard.
   Optional Polycarbonate lens available.
- UL listed for U.S. and Canada
- IP 67
- NSF slash zone
- Closed cell polyurethane gasket with no seams
- Optional emergency battery backup ballast
- Available in 120, 277, 347 and 480 volt



www.ldpi-inc.com






## **APPLICATIONS**

Warehouses, Paper Mills
Parking Garages, Tunnels
Locker Rooms
Water Treatment Plants
Kitchens, Showers
Food Processing
Marinas/Offshore Facilities
Breweries and Bottling
Livestock Containment
Hospitals and Schools



The 379 Series is a perfect fixture for a multitude of applications desiring a wet/damp fixture or an enclosed high bay fixture. The 379 is a glass fiber reinforced product with injection molded lens options for precise detail and strength. The lenses also have frosted ends, lineal prism sides and an optically clear face for maximum photometric output. All hardware is stainless steel with tamper resistant latches. The gear tray hinges at both sides with tool-less latches for ease of accessibility and maintenance. Ask us about our customized performance reflector option. Lamps not included.


## **379 SERIES DIMENSIONS**

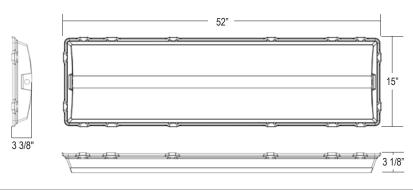



Dimensions are nominal

STANDARD MOUNTING: 6986 standard bracket for cable hang (cable NOT included) or bracket with "V" hook - not shown ADDITIONAL CEILING MOUNTS:

Ceiling mount system kit: 8366: stainless steel ceiling mounting brackets, sealing washer, 1/2" conduit hub, 1/2" conduit hub plug and stainless steel support plate.







Ceiling mount system kit 8367 - Square bend U bolt

Ceiling mount system kit 8368 - U bolt

Ceiling mount system kit 8369 - 3 Ft. rod

