



Photometric Report (Type C)

Filename: HAZ001I.ies

Maximum Candela = 1000 at 0 H 85 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.38

Luminaire Efficacy Rating (LER): 8318

Indoor Classification: Semi-Direct

BUG Rating : B2-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 85 Vertical

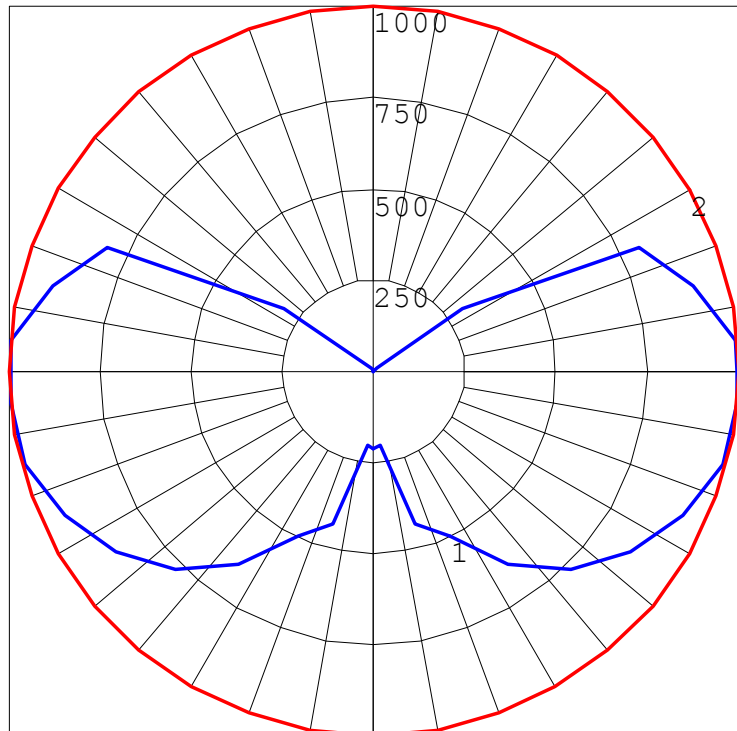



Photometric Report (Type C)

Filename: HAZ001I.ies

Maximum Candela = 1000 at 0 H 85 V

Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.38

Luminaire Efficacy Rating (LER): 8318

Indoor Classification: Semi-Direct

BUG Rating : B2-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	120.0	1.3	1.4
FM (30-60)	746.3	7.9	9.0
FH (60-80)	922.4	9.7	11.1
FVH (80-90)	810.5	8.5	9.7
BL (0-30)	120.0	1.3	1.4
BM (30-60)	746.3	7.9	9.0
BH (60-80)	922.4	9.7	11.1
BVH (80-90)	810.5	8.5	9.7
UL (90-100)	545.4	5.7	6.6
UH (100-180)	2574.1	27.1	30.9
Total	8317.9	87.6	100.0
BUG Rating	B2-U5-G5		

