



## Photometric Report (Type C)

Filename: HAZ060I.ies

Maximum Candela = 3160 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.40

Luminaire Efficacy Rating (LER): 30313

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

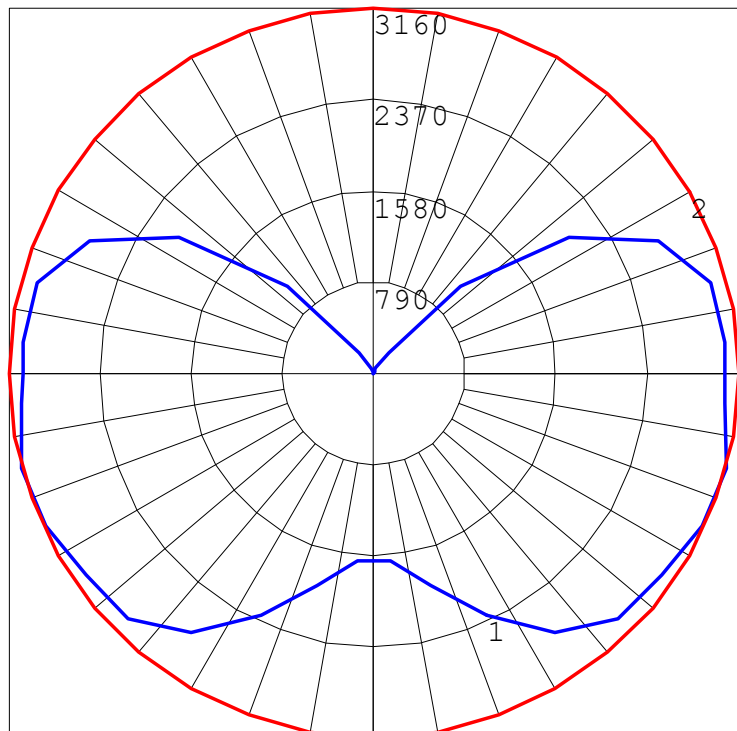



## Photometric Report (Type C)

Filename: HAZ060I.ies

Maximum Candela = 3160 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.40

Luminaire Efficacy Rating (LER): 30313

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	583.0	1.7	1.9
FM (30-60)	2971.6	8.7	9.8
FH (60-80)	3086.4	9.1	10.2
FVH (80-90)	2512.3	7.4	8.3
BL (0-30)	583.0	1.7	1.9
BM (30-60)	2971.6	8.7	9.8
BH (60-80)	3086.4	9.1	10.2
BVH (80-90)	2512.3	7.4	8.3
UL (90-100)	1667.5	4.9	5.5
UH (100-180)	10338.7	30.4	34.1
Total	30312.8	89.1	100.0
BUG Rating	B4-U5-G5		

