



## Photometric Report (Type C)

Filename: HAZ123I.ies

Maximum Candela = 3173 at 90 H 65 V

### Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.24

Luminaire Efficacy Rating (LER): 10352

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 90 - 270 Horizontal

Horizontal Cone Through:

2) 65 Vertical

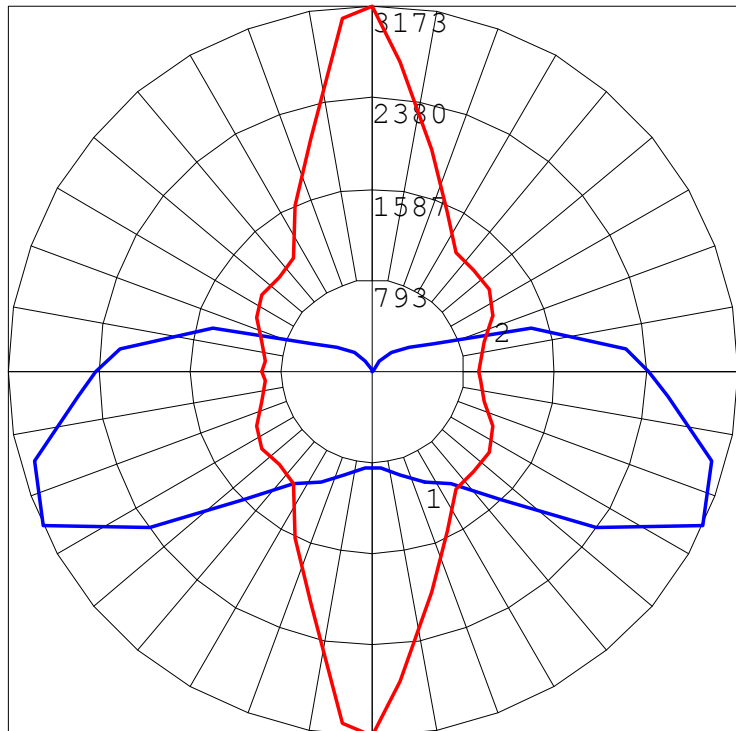



## Photometric Report (Type C)

Filename: HAZ123I.ies

Maximum Candela = 3173 at 90 H 65 V

### Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.24

Luminaire Efficacy Rating (LER): 10352

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	265.9	1.9	2.6
FM (30-60)	1160.7	8.3	11.2
FH (60-80)	1404.4	10.0	13.6
FVH (80-90)	1039.0	7.4	10.0
BL (0-30)	269.2	1.9	2.6
BM (30-60)	1177.3	8.4	11.4
BH (60-80)	1427.3	10.2	13.8
BVH (80-90)	1075.7	7.7	10.4
UL (90-100)	595.6	4.3	5.8
UH (100-180)	1937.0	13.8	18.7
Total	10352.1	73.9	100.0
BUG Rating	B3-U5-G5		

