



## Photometric Report (Type C)

Filename: HAZ4145.ies

Maximum Candela = 2966 at 0 H 70 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 69

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 70 Vertical

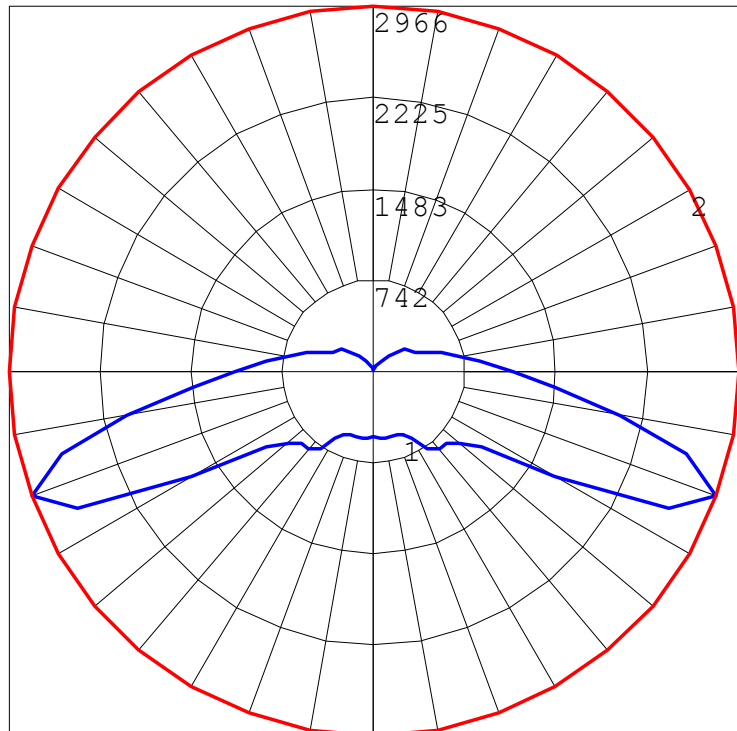



## Photometric Report (Type C)

Filename: HAZ4145.ies

Maximum Candela = 2966 at 0 H 70 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 69

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	238.6	1.7	2.0
FM (30-60)	1101.3	7.9	9.2
FH (60-80)	2597.6	18.6	21.6
FVH (80-90)	836.4	6.0	6.9
BL (0-30)	238.6	1.7	2.0
BM (30-60)	1101.3	7.9	9.2
BH (60-80)	2597.6	18.6	21.6
BVH (80-90)	836.4	6.0	6.9
UL (90-100)	549.5	3.9	4.6
UH (100-180)	1937.9	13.8	16.1
Total	12035.2	86.1	100.0
BUG Rating	B4-U5-G5		

