



## Photometric Report (Type C)

Filename: HAZ4161.ies

Maximum Candela = 2509.080078125 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 10873

Indoor Classification: Direct

BUG Rating : B3-U3-G4


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

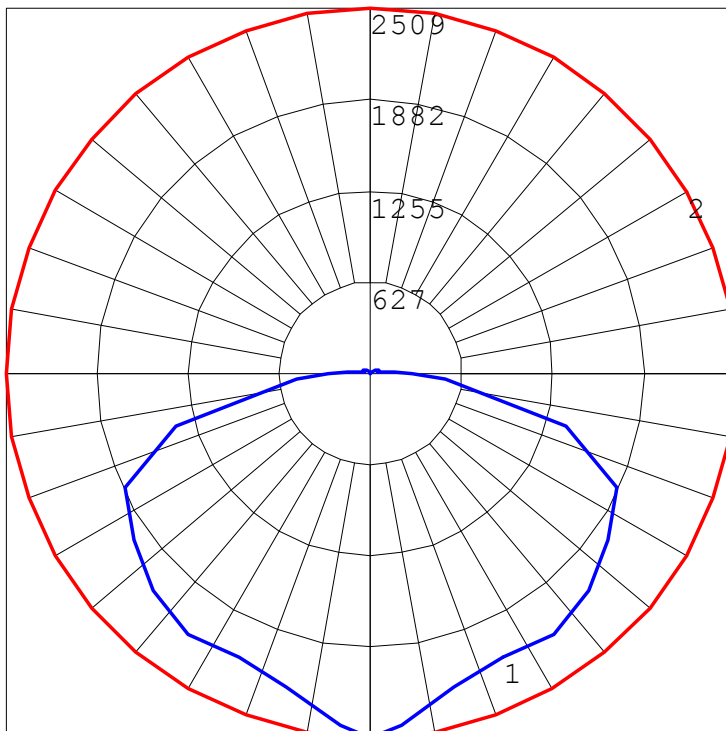



## Photometric Report (Type C)

Filename: HAZ4161.ies

Maximum Candela = 2509.080078125 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 10873

Indoor Classification: Direct

BUG Rating : B3-U3-G4

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	662.2	4.7	6.1
FM (30-60)	2218.3	15.8	20.4
FH (60-80)	1755.9	12.5	16.1
FVH (80-90)	622.8	4.4	5.7
BL (0-30)	662.2	4.7	6.1
BM (30-60)	2218.3	15.8	20.4
BH (60-80)	1755.9	12.5	16.1
BVH (80-90)	622.8	4.4	5.7
UL (90-100)	123.1	0.9	1.1
UH (100-180)	231.8	1.7	2.1
Total	10873.3	77.4	100.0
BUG Rating	B3-U3-G4		

