



Photometric Report (Type C)

Filename: HAZ221I.ies

Maximum Candela = 4131 at 85 H 65 V

Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 3340

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3


Polar Candela Curves:

Vertical Plane Through:

1) 85 - 265 Horizontal

Horizontal Cone Through:

2) 65 Vertical

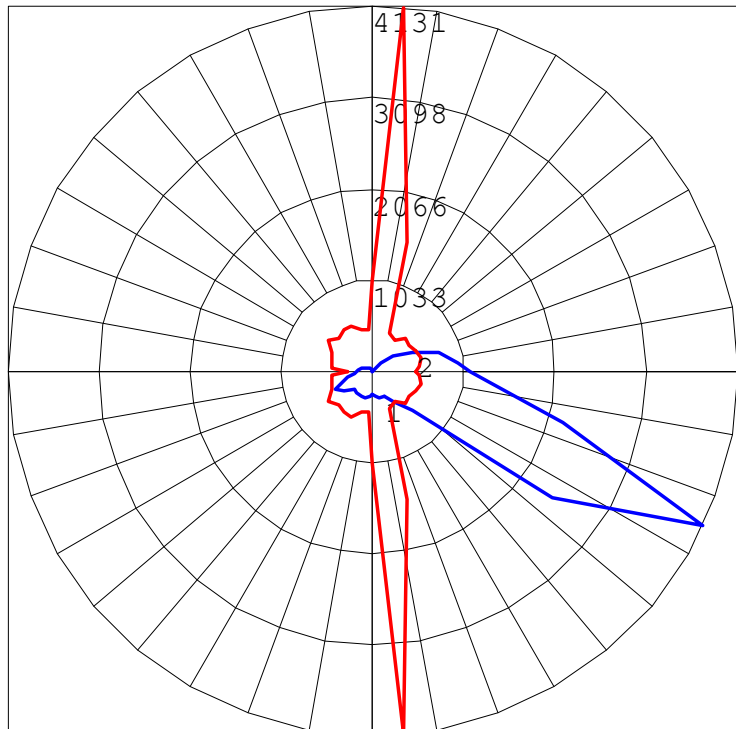



Photometric Report (Type C)

Filename: HAZ221I.ies

Maximum Candela = 4131 at 85 H 65 V

Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 3340

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	81.6	2.0	2.4
FM (30-60)	417.1	10.4	12.5
FH (60-80)	768.3	19.2	23.0
FVH (80-90)	317.2	7.9	9.5
BL (0-30)	81.1	2.0	2.4
BM (30-60)	316.6	7.9	9.5
BH (60-80)	452.6	11.3	13.6
BVH (80-90)	205.6	5.1	6.2
UL (90-100)	127.7	3.2	3.8
UH (100-180)	571.7	14.3	17.1
Total	3339.5	83.3	100.0
BUG Rating	B1-U4-G3		

