



Photometric Report (Type C)

Filename: HAZ401I.ies

Maximum Candela = 401 at 0 H 55 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.33

Luminaire Efficacy Rating (LER): 2984

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 55 Vertical

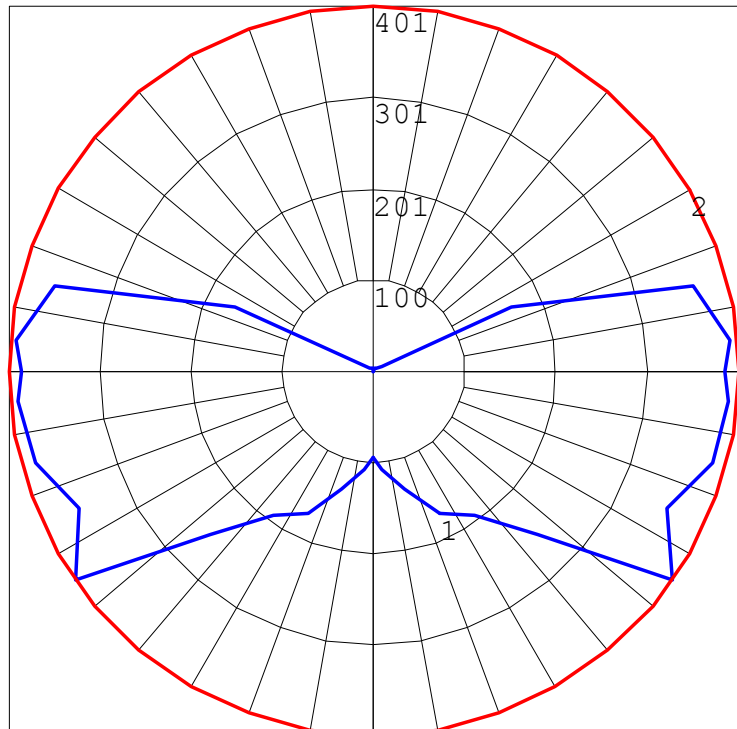



Photometric Report (Type C)

Filename: HAZ401I.ies

Maximum Candela = 401 at 0 H 55 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.33

Luminaire Efficacy Rating (LER): 2984

Indoor Classification: Semi-Direct

BUG Rating : B1-U4-G3

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	41.5	1.0	1.4
FM (30-60)	266.7	6.7	8.9
FH (60-80)	370.9	9.3	12.4
FVH (80-90)	316.4	7.9	10.6
BL (0-30)	41.5	1.0	1.4
BM (30-60)	266.7	6.7	8.9
BH (60-80)	370.9	9.3	12.4
BVH (80-90)	316.4	7.9	10.6
UL (90-100)	213.8	5.3	7.2
UH (100-180)	778.9	19.5	26.1
Total	2983.7	74.6	100.0
BUG Rating	B1-U4-G3		

